

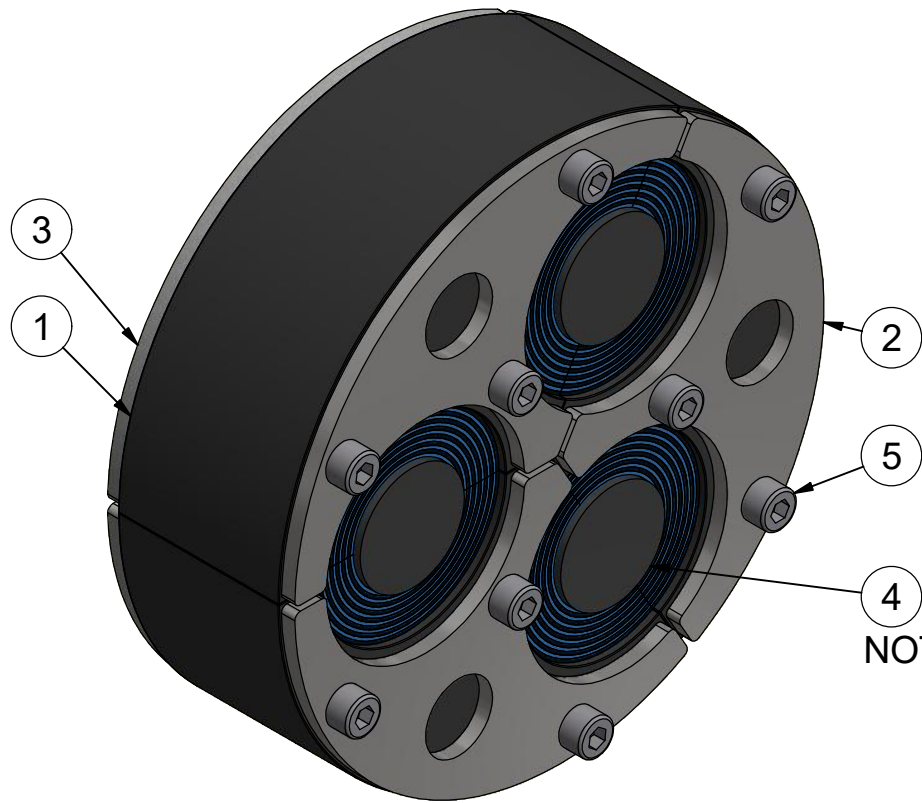


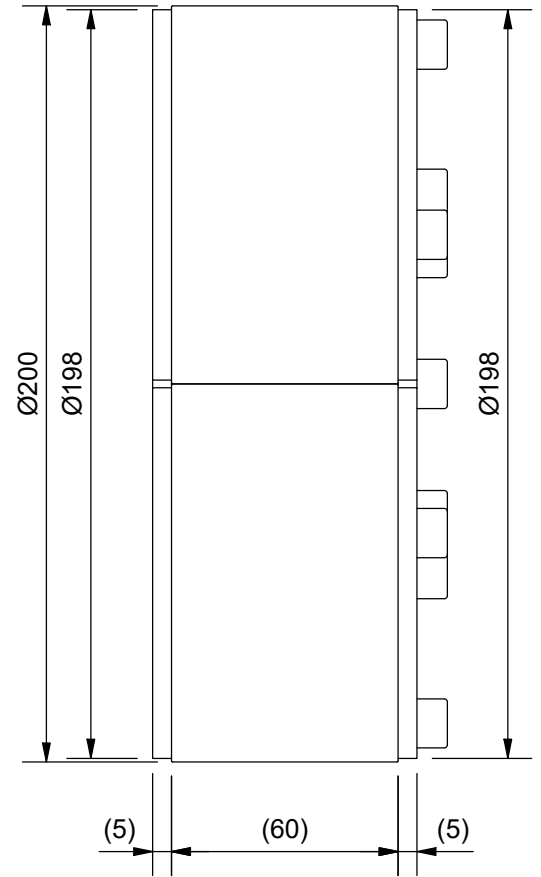

NOTE #1

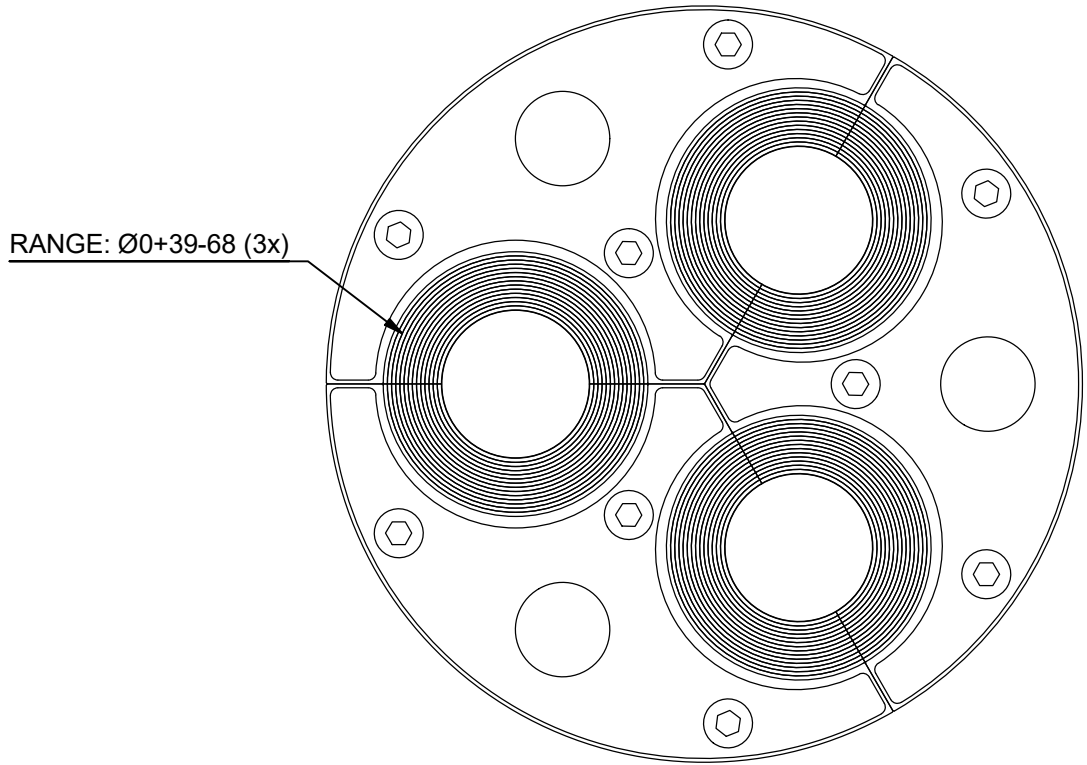

NOTE #1:
H3-200/3x0+39-68/60/F1/UG, WITH CORE
H3-200/3x39-68/60/F1/UG, WITHOUT CORE

7	1	INSTALLATION INSTRUCTION		0
6	1	LUBRICANT	TALLOW	0
5	9	SCREW	MC6S M8x70 A4 ISO 4762	0
4	3	CORE 39 L=60	ROXYLON BLACK	0.1
3	3	REAR FITTING	H3-200 UG	0.2
2	3	FRONT FITTING	H3-200 UG INSERTABLE	0.2
1	3	RUBBER FRAME		0.5

ITEM	QTY	Designation	Specification	Weight
General tolerances used for manufacturing shown in document DOC-002180		Designed by/date se-larlar 2021-10-14	Latest save date 2021-10-15	Format A3
Scale 1 / 1		Sheet no 1 / 1		TotWeight 3,5 kg
Title H SEAL / UG H3-200/3x0+39-68/60/F1/UG		Projection method 		Rev A
Restricted due to www.roxtec.com		Drawing number S1572143		
Information drawing				

A		2021-10-14	se-larlar
Rev	Type of revision	Date	Sign